Nordic EcoEnergy Svensk Återförsäljare Nordic Eco Energy AB
Tel. 070-644 28 16 - info@nordicecoenergy.se - www.nordicecoenergy.se

CORINTHIA

CORINTHIA – Ø 60 – 1 light

datasheet

CODE NO. **1204**

AN = Anthracite
AG = Aluminum Grey

27K (2700K) / **3K** / **4K**

H 225 mm
Ø 60 mm
110 mm

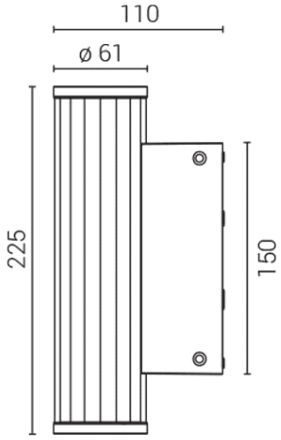

LAMP	LED
NOMINAL LUMEN	300
REAL LUMEN OUTPUT	163
WATTAGE	1x 3W
VOLTAGE	100÷240V 50/60Hz
IP	IP 65
IK	IK10 (20 joules)
CLASS	Classe I
CERTIFICATION	CE UKCA
CONFORMITY	EN 60598-1 +2-1
LED ENERGY CLASS	D (2700K - 3000K) / C (4000K)

Wall mounted outdoor luminaire

Striated extruded aluminium body

Glazing bead frame and box to fix to wall in low copper content die-cast aluminium

Diffuser in milled and tempered transparent glass, flush with the frame

Hexagonal screws recessed in the frame

Rear cable entry

IP68 connector plug/socket for 3x2,5 mm² cables supplied separately (code 1943)

Driver inside

Light source: LED unit / CRI 80

Optics: 18° (standard code) / 38° (code + 38) / 90° (code + 90)

Double varnished finish after pickling, chromic passivation (trivalent chromium), epoxy primer and polyester powder coating

goccia ILLUMINAZIONE

CSQ IQNet UNI EN ISO 9001